



NPR72GR-5JXA

ISUZU

NPR72GR – 5JXA

4 X 2 TRUCK

GVM	GCM	TARE WEIGHT	NOMINAL PAYLOAD	WHEELBASE	SHORT CODE
7950kg	9950kg	2650kg	4500kg	2765mm	NP 12

ENGINE

Model: 4HJ1
 Type: 4 cylinder in line
 OHC direct injection diesel
 Bore x Stroke: 115mm x 120mm
 Displacement: 4985cc
 Compression Ratio: 19.5:1
 Power Output: 150 PS @ 3100rpm
 Torque: 363 Nm @ 1600rpm

FRONT AXLE/SUSPENSION

Capacity: 3100kg
 Semi elliptical, alloy steel, tapered multi leaf springs. Hydraulic double acting, telescopic shock absorbers
 *Axle load restricted to 2570kg by tyres

CAB EXTERIOR

Forward control all steel tilt cab
 Liquid infusion cab suspension
 Large "Aero" Type rear view mirrors
 L/H electric rear view mirror
 90 degree wide opening doors
 Large aluminum inner door steps
 Cab finished in "Arc White"

STEERING

Engine sensitive power steering
 Tilt and telescopic adjustable

STANDARD EQUIPMENT

Heavy duty cloth high back seats
 Air conditioning
 Central Locking
 Power Windows
 Key reminder buzzer
 AM/FM radio twin speakers & alarm
 Drivers side door step light
 Passenger & center seat back tray
 Back panel tray
 Side intrusion beams
 3 point ELR L & R side seatbelts
 Drivers seatbelt reminder light
 Locking fuel cap
 Drop side rear body
 Fog lamps
 Sliding drawer cup holder

TRANSMISSION

Model: MXA6R
 6 spd overdrive, synchromesh with with short-throw drop type floor mounted gearshift. Gear Ratios:1
 1st 4.987
 2nd 2.870
 3rd 1.594
 4th 1.000
 5th 0.728
 6th 0.626
 Reverse 4.774

WHEELS & TYRES

One piece 16in rim – 5 stud
 215/80R16 tubeless radials
 Single front – dual rear

205/85R16

BRAKES

Hydraulic dual circuit vacuum assisted
 Front two leading shoes
 Rear dual two leading shoes
 Transmission mounted internal expanding park brake.
 Auxiliary exhaust brake
 HSA – Hill Start Assist

REAR AXLE/SUSPENSION




Ratio: 5.571:1 Capacity: 4850kg
 Semi elliptical, alloy steel, tapered multi leaf springs
 Hydraulic double acting, telescopic shock absorbers

ELECTRICAL

24 Volt 50 amp alternator
 Batteries: 2 x 75D23R in line

WARRANTY

Vehicle, powertrain & corrosion warranty: 12 months or 100, 000km (whichever comes first).

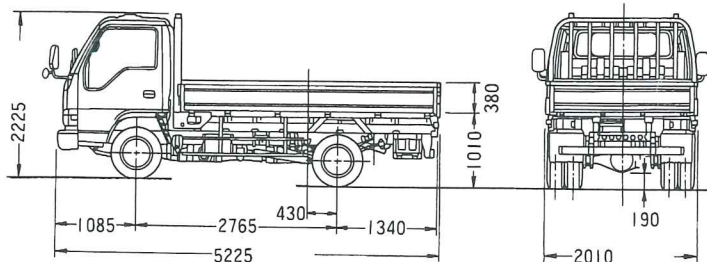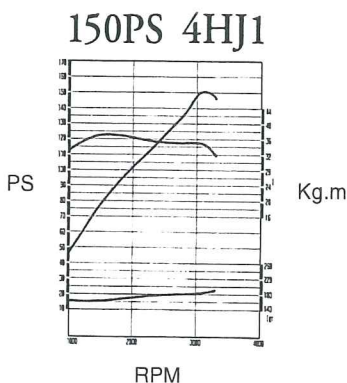

Rim 5.5 Jx 116.5